

# GSV6201

DisplayPort 1.4 to HDMI 2.1 Converter with Embedded MCU

March, 2022

**Preliminary Product Specification** 

GScoolink Microelectronics Co., LTD. ©2022 All rights reserved.

# 1. General Description

## **1.1 General Information**

Gscoolink GSV6201 is a high-performance, low-power, USB Type-C Alternate Mode DisplayPort 1.4 to HDMI 2.1 converter. By integrating enhanced microcontroller, GSV6201 has created a cost-effective solution that provides time-to-market advantages. The DisplayPort Receiver supports up to 32.4Gbps (HBR3, 4-lane) and HDMI Transmitter supports up to 48Gbps (FRL, 12G4Lane). Integrated Power Delivery 3.0 controller handles Type-C CC interface for USB power management and DisplayPort mode entry. The superior architecture of GSV6201 provides economical smaller footprint solutions using QFN64, targeting applications of Type-C Docking, Type-C dongle and DP to HDMI cable.

GSV6201 supports all DisplayPort SDP packets and DSC stream pass-through to HDMI output. HDCP 1.4 and HDCP 2.2/2.3 are implemented in GSV6201 for both DisplayPort and HDMI TMDS and FRL mode. Color Space Conversion is supported at HDMI Tx in TMDS mode. Flexible implementations of Audio Insertion, Audio Extraction and SPDIF to I2S conversion are supported in GSV6201.

An internal Video Generator can be used to generate any uncompressed video timing defined in HDMI 2.1, such as 8K@30Hz, 4K@120Hz, 480i@60Hz.

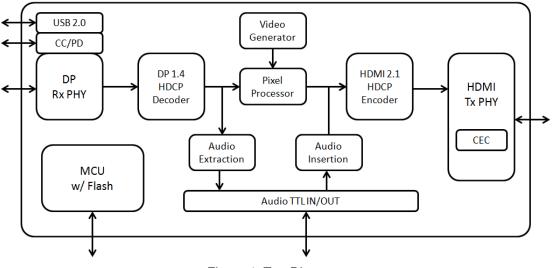


Figure 1. Top Diagram

The supported audio formats are listed in Table 1

Packet ID	Packet Type	Sampling Frequency (KHz)		
		32/44.1/48/88.2/	256/352.8/384/	64/128
		96/176.4/192	512/705.6/768	
0x02	Audio Sample Packet	X		Y
	(LPCM and Compressed Audio)	Ŷ		
0x07	One Bit Audio Sample Packet	Y		
0x08	DST Audio Packet	Y		
0x09	High Bit-rate Audio Stream Packet	Y	Y	

#### Table 1. Supported Audio Format

## 1.2 Features

#### 1.2.1 DisplayPort Receiver

- Compliant with VESA DisplayPort 1.4a
- Compliant with HDCP 2.2/2.3 and HDCP 1.4
- Support HBR3, HBR2, HBR and RBR (8.1/5.4/2.7/1.62 Gbps)
- Flexible 1/2/4 lane Main-Link configuration
- Programmable Adaptive Equalization
- Support Full-Link Training and No-Link Training
- Support High Dynamic Range (HDR) and Dynamic/Static Metadata
- Support Adaptive Sync/FreeSync
- Support Audio Extraction
- Support Horizontal Blanking Expansion up to 4K@120Hz format
- Support Forward Error Correction (FEC)
- Embedded arbitrary EDID and MCCS
- Support Spread Spectrum Clock (SSC)

#### 1.2.2 HDMI Transmitter

- Compliant with HDMI 2.1, HDMI 2.0b, HDMI 1.4b
- Compliant with HDCP 2.2/2.3 and HDCP 1.4
- Data rate up to 48Gbps (FRL 12Gbps/4 Lane)
- Programmable Voltage Swing, Slew-Rate and Pre-emphasis
- Support AC-coupling on TMDS
- Support Color Space Converter in HDMI 2.0 mode

- Support HDR (HDR10/HDR10+/Dolby Vision/HLG)
- Support Variable Refresh Rate (VRR)/FreeSync
- Support DSC encoded stream pass-through
- Hardware CEC Engine for Low Level protocol decoding
- 5V tolerance on DDC/HPD/CEC pins

#### 1.2.3 USB Type-C Interface

- USB Power Delivery 3.0 Compliant controller
- 3 Configuration Channels (CC) with built-in Rp/Rd resistors
- Dual Role Power Port (DRP)
- Fast Role Swap
- USB 2.0 full-speed billboard enumeration

#### 1.2.4 Audio Input/Output

- I2S and SPDIF Audio Extraction from DisplayPort Rx
- I2S/SPDIF Audio Insertion to HDMI Tx
- SPDIF/I2S/HBR/DSD/TDM Format Supported for Audio Extraction and Insertion
- SPDIF to I2S Conversion using single TTL bus in Bi-direction

#### 1.2.5 System Features

- Embedded internal MCU
- Optional Internal Flash or External pins of Flash QSPI interface
- External 25MHz Crystal required
- Available Pins for UART/Timer/GPIO
- Temperature Sensor Monitoring Circuit

## 1.3 Chip Application Modes

## 1.3.1 DP to HDMI Conversion

Based on the DisplayPort input and output requirement, GSV6201 can dynamically switch between FRL and HDMI 2.0 mode for the best compatibility in 8K/4K/2K timings. Audio extraction can be applicable if required.

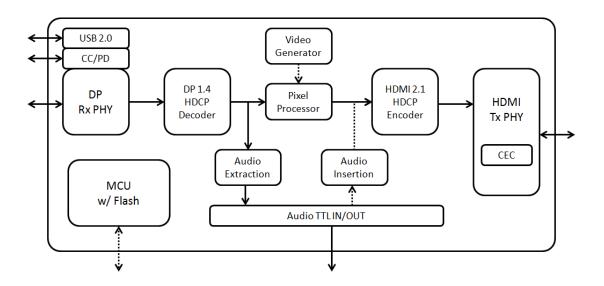


Figure 2. Switch Between FRL/TMDS Conversion

### 1.3.2 Audio Insertion for HDMI Tx

I2S/SPDIF audio stream and DisplayPort Rx video can be inserted into HDMI Tx.

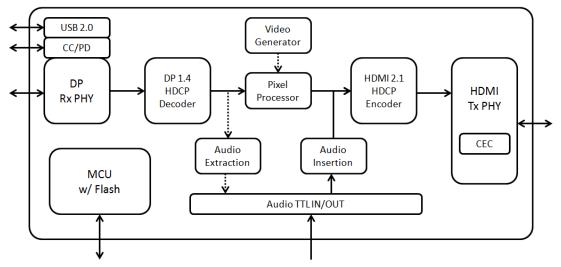


Figure 3. Audio Insertion Application

MILLIMETER

MIN NOM MAX

0.75 0.80

0.02

7.90 8.00 8.10

6. 10 6. 20 6. 30 0. 40BSC

6.00BSC

6.10 6.20 6.30

6.00BSC

0.30 0.35 0.40

258\*258

7.90 8.00

0.45 0.50 0.55

0.20

0.05

8.10

0.70

0.15 0.20 0.25 0.18 0.20 0.25

SYMBOL

A

A1

b

c D

D2

e Nd

Е

E2

Ne

L

Κ

h

载体尺寸 (mil)

# 4. Package Information

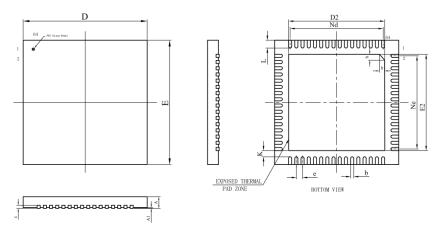


Figure 8. Package Dimensions (QFN64)

# 5. Ordering Guide

Part Number.	Temperature Range	Package Description	Packing Type
GSV6201	–20°C to +85°C	QFN64	Tray